

Article No.: A46010

Articlename: SYS998603200 AZURA UHPLC HPG System

High Pressure Gradient UHPLC 1000 bar System with 3D diode array detector 190-1000 nm

System Proposal

Eluent delivery

The UHPLC **Pump P6.1L with a HPG configuration** features a solvent selection valve to set up to 4 solvents to the system of which two can be blended simultaneously at up to 1000 bar. The internal degassing unit will prevent air bubbles in the system. Every P 6.1L comes with an attached mixing chamber, which can be changed to a larger volume depending on the applications needs.

Sample Injection

The **Autosampler 6.1L** can inject $0.1-5000~\mu l$ to have a large flexibility. Using standard vials or two microtiter plates will give you a maximum sample capacity of up to 768 samples or 108 vials. The UHPLC version can be used up to 1240 bar system backpressure.

Column thermostating


The **Column thermostat CT 2.1** is suitable for column thermostatization above and below room temperature. The instrument operates with a microprocessor controlled Peltier element for exact temperature settings.

Chromatography data system

KNAUER **ClarityChrom**® is a powerful, yet easy-to-use chromatography software for instrument control, data acquisition and data processing. It is an economical solution compared to other more complex chromatography software while still offering FDA 21 CFR Part 11 compliance.

Detection

The diode array detector DAD 6.1L covers all conceivable applications

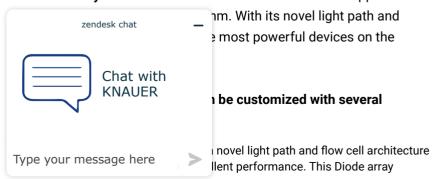

detector can be used in the wavelength range of 190-700 nm.

- The detector MWD 2.1L is an 8 channel, sensitive multiwavelength detector combining high performance with easy handling at an affordable price. This multiwavelength detector detector can be used in the wavelength range of 190-700 nm.
- The variable single wavelength UV/VIS detector UVD 2.1L comes with an
 installed deuterium lamp which covers a wavelength range from 190 to 750
 nm. It is a competitively priced detector for routine HPLC applications
 including fast LC methods.

System Configuration: High Pressure Gradient UHPLC System with	System code
3D diode array detector 190-1000 nm	998603200
3D diode array detector 190-700 nm	998503200
Variable multi wavelength UV/VIS detector	998403200
Variable single wavelength UV/VIS detector	998203200
Fluorescence Detector	998803200

Customized configurations like combinations of several detectors are also available. Please contact us!



TECHNICAL DATA

Analytical system

Application area	HPLC
Pump system	Gradient
Gradient	Binary HPG
Injection	Autosampler
Detector	Diode array detection DAD
Software	ClarityChrom
Pressure	1000 bar
Column thermostat	Yes

SYSTEM COMPONENTS



AZURA Eluent tray E 2.1L

Article No. AZC00

AZURA® Eluent tray E 2.1L for AZURA® devices with a capacity of 6 x 1 l bottles or 4 x 2.5 l bottles or 2 x 5 l bottles, (delivery without bottles)

Type: Eluent tray



AZURA P 6.1L

Article No. APH35GA

AZURA® Pump P 6.1L (HPG), with 5 ml pump head (stainless steel), degasser and mixer (100 μ l)

Max. flow rate: 5 ml/min

Pump head materials: Stainless Steel
Gradient: High pressure gradient (binary)

Pump features: Active pulsation compensation, RFID for automatic pump head detection, Integrated pressure sensor, Purge valve (manual), Leak

management, Piston seal wash

Maximum delivery pressure [MPa]: 100 MPa



Set of eluent supply bottles for analytical HPG systems

Article No. A5324-4

Set of eluent supply bottles, 2 x 1 L bottles and 1 x 250 ml bottle for piston backflushing, includes closed screw caps



Eluent waste kit for AZURA Analytical systems

Article No. A59258

Eluent waste kit for all AZURA Analytical systems, incl. filter, waste can and cap



Autosampler AS 6.1L

Article No. AAA10AA

AZURA® Autosampler AS 6.1L analytical HPLC autosampler, 1240 bar

Maximum back pressure: 1240 bar

Sample loop: 100 µl
Sample tray cooling: None

Autosampler Flow Path: Analytical



Screw neck vial set N9, 1.5 ml, clear, wide opening, 100x

Article No. A0638-6

Vials: Screw neck vials N9 (ø 11.6 mm), 1.5 ml, clear glass, flat bottom, wide opening, with

label & scale

Caps: Screw caps blue with septum silicone beige/PTFE white

100 pcs each



AZURA CT 2.1

Article No. ATC00

Column thermostat AZURA CT 2.1 for constant temperatures and reproducible results

Temperature range : 5-85 °C



AZURA Detector DAD 6.1L

Article No. ADC11

AZURA® Detector DAD 6.1L Diode array detector DAD 6.1L without flow cell 190 - 1000 nm, incl. test cell

Detector type: Diode array detector

Detection channels: 8 (Digital)/4 (Analog)

Wavelength range: 190 - 1000 nm

Number of diodes: 1024

Linearity: > 2.5 AU at 274 nm (ASTM E1657-98)



Analytical KNAUER PressureProof UV Flow Cell Cartridge

Article No. AMC38

10 mm path length, $10\mu\text{l}$, 1/16", 300 bar, PressureProof Flow cell cartridge for AZURA® Detector DAD/MWD

Flow cell type: Analytical UV flow cell

Path length: 10 mm
Capillary connection: 1/16"
Max. flow rate: 20 ml/min

Flow cell volume: 10 µl



ClarityChrom 8.2.3 - Workstation, autosampler control included

Article No. A1670

ClarityChrom® single instrument license for one time base

Software name: ClarityChrom



ClarityChrom 8.2.3 - PDA extension

Article No. A1676

ClarityChrom® option for PDA data processing

Software name: ClarityChrom



Chromatography Workstation: PC plus monitor

Article No. A13120

Desktop PC (SFF) for PurityChrom® and ClarityChrom® with 24" monitor, English edition Windows 10 Prof. 64-bit English, Intel® Core™ i5, 8 GB RAM, 256 GB SSD, two network cards



Router 8-Port LAN, WiFi, international

Article No. A64809INT

WiFi router, 8x LAN GBit RJ-45 ports, 1x WAN GBit RJ-45 port, power plug UK, US or AUS



AZURA® Analytical K-Connect start-up kits, stainless steel, 1/32" capillaries with fitting sleeves for 1/16"connections

Article No. AZF40

Set of precut capillaries 0.1 mm, fittings, connectors and adapters, red



Tool kit AZURA

Article No. A1033

Tool Kit AZURA® for systems with PEEK or pre-cut capillary kits

Type: Tool kit

DOCUMENTS AND MORE INFORMATION

AZURA Analytical HPLC and UHPLC brochure

AZURA Analytical HPLC/UHPLC brochure, V7852US, V4, 2017-08

Brochure English

AZURA System Selection Guide (V7857US)

System suggestions for analytical HPLC/UHPLC, FPLC, preparative LC and sample preparation systems. English language, V7857US

Brochure English

RELATED PRODUCTS



Basic Diode Array Detector for Liquid Chromatography and Process Technology AZURA® Detector DAD 2.1L Diode array detector DAD 2.1L without flow cell 190 - 700 nm, incl. test cell

Article No.: ADC01



Versatile Multi Wavelength UV-Detector for Liquid Chromatography and Process Technology

AZURA® Detector MWD 2.1L Multiwavelength detector MWD 2.1L, without flow cell 190 - 700 nm, incl. test cell

Article No.: ADB01



Superior Single Wavelength UV-Detector for Liquid Chromatography and Process Technology

AZURA® Detector UVD 2.1L with deuterium lamp without flow cell, incl. test cell

Article No.: ADA01XA



Basic Fluorescence Detector for Liquid Chromatography

Fluorescence detector RF-20 A 200 - 650 nm incl. accessories and flow cell

Article No.: A59200



Do you need more details or a quote?

We are happy to help you





Technical data or prices are subject to change without notice. Prices may vary by country and do not include taxes, customs duties or delivery.

All trademarks are the property of their respective owners. Our general terms and conditions apply: www.knauer.net/terms